

## Power Light 100 W 12 V PK22s

These off-road lighting solutions from NEOLUX turn night into day. Choose from the robust and reliable Power Light, with its powerful light output, the Blue Power Light, with its stylish bluish white light, or the Weather Light, which is optimized for fog, rain or snow. Whether you need the dark spaces ahead to be brightly lit or are facing rough weather conditions, our off-road range has a solution for you.



## Areas of application

Headlight


• Forestry, agriculture and the construction industry for off-road area

\_\_\_\_



Application (Category and Product specific)	Halogen headlight lamp	
Electrical Data		
Power input	85 W	
Test voltage	13.2 V	
Nominal wattage	100 W	
Nominal voltage	12 V	
Photometric Data		
Color temperature	3200 K	
Nominal luminous flux	2300 lm	
Luminous flux tolerance	±10 %	
Physical Attributes & Dimensions		
Diameter	11.0 mm	
Product weight	6.90 g	
Length	42.0 mm	
Lamp base	PK22s	
Diameter	11.0 mm	
Lifetime Data Lifespan Tc	150 hr	
Lifespan B3	50 hr	
Capabilities		
Technology	Halogen lamp	
Certificates & standards		
ECE category	H3 base	
British standard	483	
Logistical data		
Order reference	N483	
Environmental & Regulatory Information Primary article identifier	4008321760616	
Candidate list substance 1	No declarable	
	substances contained	
Declaration no. in SCIP database	No declarable substances contained	

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N483	4008321760616	FOLDING BOX	1

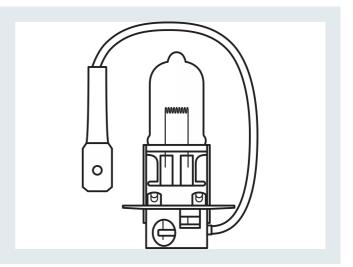

## Legal advice

These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.

**NEOLUX**<sup>®</sup> GERMAN TECHNOLOGY

www.neolux-lighting.com

NEOLUX Automotive Lighting OSRAM GmbH Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020