

Standard 21 W 12 V BA15s



Product family benefits

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

Product family features

- Broad product range
- Good quality thanks to German technology
- Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution

Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting

Product datasheet






Power input	25 W	
Test voltage	13.5 V	
Power input tolerance	±6 %	
Nominal wattage	21.00 W	
Nominal voltage	12.0 V	
Photometrical data		
Luminous flux	460 lm	
Luminous flux tolerance	±15 %	
Dimensions & weight		
Diameter	27.0 mm	
Product weight	7.20 g	
Length	7.20 g 52.5 mm	
Length	32,3 11111	
Lifespan		
Lifespan Tc	320 h	
Lifespan B3	120 h	
Additional product data		
Base (standard designation)	BA15s	
Cartification 0 attended		
Certificates & standards ECE category	P21W	
British standard	382	
DITUSTI Standard	302	
Logistical data		
Order reference	N382	
Environmental information		
Date of Declaration	05-03-2024	
Primary Article Identifier	3348675000268	
	4006584594726	
	4008321770479	
	4008321770929	
	4008321781154	
	4008321812674	
	4055462033901	
	4055462052636	
	4055462079763	
	4055462300904 4055462347091	
Candidate List Substance 1	No declarable	
	substances containe	
Declaration No. in SCIP database	In work	

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N382	4008321770479	Folding box	10
N382-02B	4008321781154	Blister	2

Product datasheet

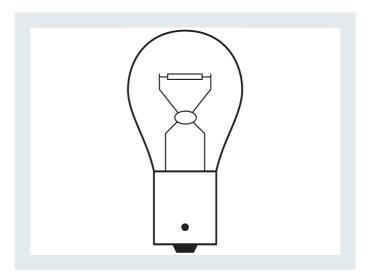



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com