

Standard 21 W 12 V W3x16d



Product family benefits

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

Product family features

- Broad product range
- Good quality thanks to German technology
- Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution


Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



| Application (Category and Product specific) | Auxiliary lamp | |
|---|------------------------------------|--|
| | | |
| Electrical data | 25.14 | |
| Power input | 25 W | |
| Test voltage | 13.5 V | |
| Power input tolerance | ±6 % | |
| Nominal wattage | 21.00 W | |
| Nominal voltage | 12.0 V | |
| Photometrical data | | |
| Luminous flux | 280 lm | |
| Luminous flux tolerance | ±20 % | |
| Dimensions & weight | | |
| Diameter | 20.0 mm | |
| Product weight | 6.00 g | |
| Length | 47.5 mm | |
| lifornan | | |
| Lifespan Lifespan Tc | 600 h | |
| Lifespan B3 | 400 h | |
| | 100 11 | |
| Additional product data | | |
| Base (standard designation) | WX3x16d | |
| Certificates & standards | | |
| ECE category | WY21W | |
| Logistical data | | |
| Order reference | N582A | |
| | | |
| Environmental information Date of Declaration | 06 07 2024 | |
| | 06-03-2024 | |
| Primary Article Identifier | 4052899276512 4055462301628 | |
| Candidate List Substance 1 | No declarable substances contained | |
| Declaration No. in SCIP database | In work | |
| | | |
| Packaging Information | | |

| Packaging description NEOLUX | EAN | Packaging type | Amount of article |
|---------------------------------|---------------|----------------|-------------------|
| N582A | 4052899276512 | Folding box | 10 |

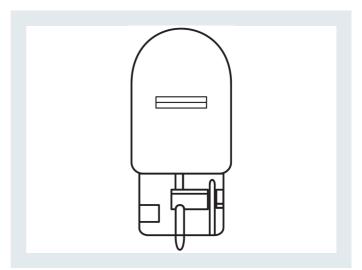



www.neolux-lighting.com

NEOLUX Automotive Lighting OSRAM GmbH Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020