

Standard 5 W 12 V BA15s



Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting

Product datasheet






Application (Category and Product specific)	Auxiliary lamp
Electrical Data	
Power input	5 W
Test voltage	13.5 V
Power input tolerance	±10 %
Nominal wattage	5 W
Nominal voltage	12 V
Photometric Data	
Nominal luminous flux	50 lm
Luminous flux tolerance	±20 %
Physical Attributes & Dimensions	
Diameter	19.0 mm
Diameter	19.0 mm
Product weight	6.00 g
Length	37.5 mm
Lamp base	BA15s
Lifetime Data	
Lifespan Tc	300 hr
Lifespan B3	100 hr
Certificates & standards	
ECE category	R5W
British standard	207
Logistical data	
Order reference	N207
Environmental & Regulatory Information	
Primary article identifier	405289924740 400658492122 400832181263 501063353704 400832178096
Candidate list substance 1	No declarable substances cor
Declaration no. in SCIP database	No declarable substances cor

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N207	4006584921225	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1
N207-02B	4008321780966	BLISTER	2
N207S	5010633537045	FOLDING BOX	1

Product datasheet

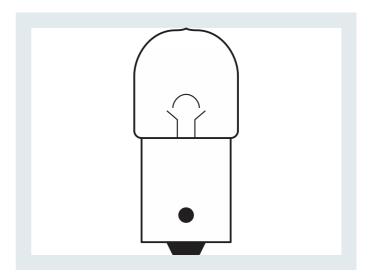



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com