

Standard 21/4 W 12 V BAZ15d



Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- · Instrument and switch lighting

Product datasheet




Application (Category and Product specific)	Auxiliary lamp	
Electrical Data		
Power input	25 W	
Test voltage	13.5 V	
Power input tolerance	±6 %	
Nominal voltage	12 V	
Photometric Data		
Nominal luminous flux	440/15 lm	
Luminous flux tolerance	±15 %	
Physical Attributes & Dimensions		
Diameter	25.0 mm	
Diameter	25.0 mm	
Product weight	10.00 g	
Length	49.5 mm	
Lamp base	BAZ15d	
Lifetime Data		
Lifespan Tc	160 hr	
Lifespan B3	60 hr	
Certificates & standards		
ECE category	P21/4W	
British standard	566	
Logistical data		
Order reference	N566	
Environmental & Regulatory Information		
Primary article identifier	4008321781048 4008321770417	
Candidate list substance 1	No declarable substances contained	
Declaration no. in SCIP database	No declarable	

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N566	4008321770417	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1
N566-02B	4008321781048	BLISTER	2

Product datasheet

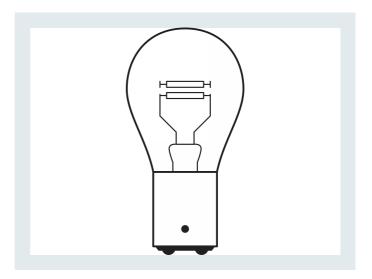



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com