

# Standard 1.2 W 12 V W2x4.6d



## **Product family benefits**

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

#### **Product family features**

- Broad product range
- · Good quality thanks to German technology
- Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution


## Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting

Electrical data			
Power input	1.22 W		
Test voltage	13.5 V		
Power input tolerance	±15 %		
Nominal wattage	1.20 W		
Nominal voltage	12.0 V		
Photometrical data			
Luminous flux	7.5 lm		
Luminous flux tolerance	±20 %		
Dimensions & weight			
Diameter	5 mm		
Product weight	0.40 g		
Length	20.0 mm		
Lifespan			
Lifespan Tc	1500 h		
Lifespan B3	500 h		
Additional product data			
Base (standard designation)	W2x4.6d		
Certificates & standards			
British standard	286		
Logistical data			
Order reference	N286		
Environmental information			
Date of Declaration	06-03-2024		
Primary Article Identifier	4008321771049   4055462031129   4055462053015   4008321770653   4055462066299		
Candidate List Substance 1	No declarable substances contained		
Declaration No. in SCIP database	In work		

# Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N286S	4008321771049	Folding box	1

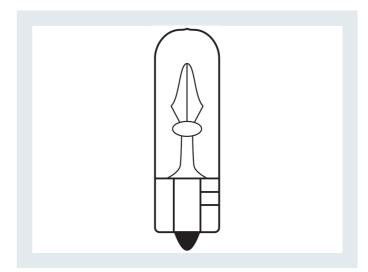



NEOLUX Automotive Lighting OSRAM GmbH Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com