

## Standard 21 W 12 V W3x16d



## Product family benefits

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

## **Product family features**

- Broad product range
- Good quality thanks to German technology
- Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution


## Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



Application (Category and Product specific)	Auxiliary lamp	
Electrical data		
Power input	25 W	
Test voltage	13.5 V	
Power input tolerance	±6 %	
Nominal wattage	2100 W	
Nominal voltage	120 V	
Photometrical data		
Luminous flux	280 lm	
Luminous flux tolerance	±20 %	
Dimensions & weight Diameter	2000 mm	
Product weight	600 g	
Length	475 mm	
Lifespan		
Lifespan Tc	600 h	
Lifespan B3	400 h	
Additional product data		
Base (standard designation)	WX3x16d	
Certificates & standards	110/2411/	
ECE category	WY21W	
Logistical data		
Order reference	N582A	
Environmental information		
Date of Declaration	06-03-2024	
Primary Article Identifier	4052899276512	
	4055462301628	
Candidate List Substance 1	No declarable substances contained	
Declaration No. in SCIP database	In work	

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N582A	4052899276512	Folding box	10

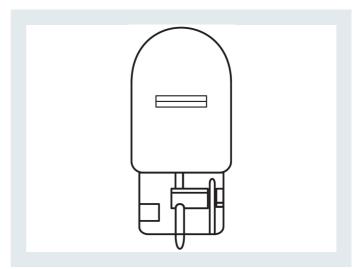



www.neolux-lighting.com

NEOLUX Automotive Lighting OSRAM GmbH Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020