




**NEOLUX®**  
GERMAN TECHNOLOGY

## Standard 21/5 W 24 V BAY15d

NEOLUX 24 V halogen lamps provide a good view and visibility in all road conditions. The lamps are easy to replace – the 24 V standard replacement is the ideal choice for this task.

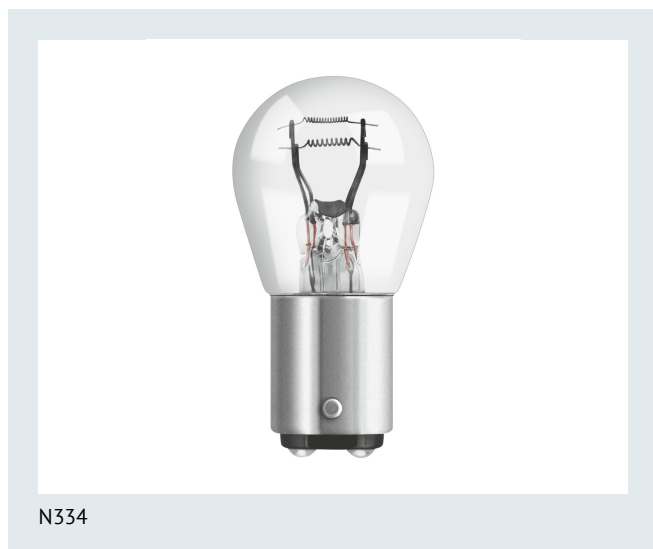

### Product family benefits

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

### Product family features

- Broad product range
- Designed specifically for 24 V
- Lamps for exterior applications are ECE certified
- Good quality thanks to German technology
- Normed light output

### Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



Electrical data

Power input	28 W
Test voltage	28.0 V
Power input tolerance	±6 %
Nominal wattage	21/5 W
Nominal voltage	240 V

Photometrical data

Luminous flux	440/40 lm
Luminous flux tolerance	±15 %

Dimensions & weight

Product weight	810 g
Length	525 mm
Diameter	2700 mm

Lifespan

Lifespan Tc	160 h
Lifespan B3	60 h

Additional product data

Base (standard designation)	BAY15d
-----------------------------	--------

Certificates & standards

ECE category	P21/5W
British standard	334

Logistical data


Order reference	N334
-----------------	------

Environmental information

Date of Declaration	06-03-2024
Primary Article Identifier	4006584920402   4055462156495   4055462219800   4055462255723
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	In work

Packaging Information

Packaging description	EAN	Packaging type	Amount of article
NEOLUX N334	4006584920402	Folding box	10

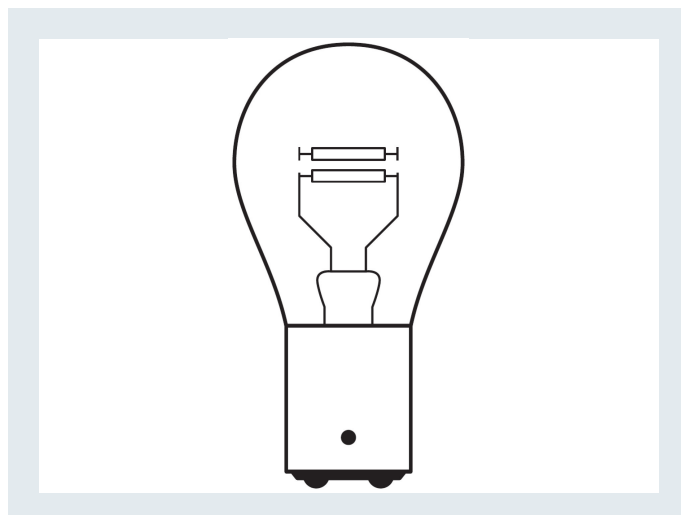

**NEOLUX**<sup>®</sup>  
GERMAN TECHNOLOGY

NEOLUX Automotive Lighting  
OSRAM GmbH

Marcel-Breuer-Str 4  
80807 Munich, Germany

Phone +49 89 6213-0  
Fax +49 89 6213-2020

[www.neolux-lighting.com](http://www.neolux-lighting.com)