

## Standard 5 W 24 V W2.1x9.5d

NEOLUX 24 V halogen lamps provide a good view and visibility in all road conditions. The lamps are easy to replace – the 24 V standard replacement is the ideal choice for this task.



## **Product family benefits**

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

## **Product family features**

- Broad product range
- Designed specifically for 24 V
- Lamps for exterior applications are ECE certified
- Good quality thanks to German technology
- Normed light output

## Areas of application


- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



Electrical data Power input Test voltage Power input tolerance Nominal wattage Nominal voltage Photometrical data Luminous flux Luminous flux tolerance Dimensions & weight Product weight Length Diameter Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference Environmental information	7 W 28.0 V ±10 % 5.00 W 24.0 V 50 lm ±20 % 1.30 g 26.8 mm 10.0 mm	
Power input Test voltage Power input tolerance Nominal wattage Nominal voltage Photometrical data Luminous flux Luminous flux tolerance Dimensions & weight Product weight Length Diameter Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	28.0 V ±10 % 5.00 W 24.0 V 50 lm ±20 % 1.30 g 26.8 mm	
Test voltage Power input tolerance Nominal wattage Nominal voltage Photometrical data Luminous flux Luminous flux tolerance Dimensions & weight Product weight Length Diameter Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	28.0 V ±10 % 5.00 W 24.0 V 50 lm ±20 % 1.30 g 26.8 mm	
Power input tolerance Nominal wattage Nominal voltage Photometrical data Luminous flux Luminous flux tolerance Dimensions & weight Product weight Length Diameter Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	±10 % 5.00 W 24.0 V 50 lm ±20 % 1.30 g 26.8 mm	
Nominal wattage Nominal voltage Photometrical data Luminous flux Luminous flux tolerance Dimensions & weight Product weight Length Diameter Lifespan Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	5.00 W 24.0 V 50 lm ±20 % 1.30 g 26.8 mm	
Nominal voltage Photometrical data Luminous flux Luminous flux tolerance Dimensions & weight Product weight Length Diameter Lifespan Lifespan Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	24.0 V 50 lm ±20 % 1.30 g 26.8 mm	
Luminous flux Luminous flux tolerance Dimensions & weight Product weight Length Diameter Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	±20 % 1.30 g 26.8 mm	
Luminous flux tolerance Dimensions & weight Product weight Length Diameter Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	±20 % 1.30 g 26.8 mm	
Dimensions & weight Product weight Length Diameter Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	1.30 g 26.8 mm	
Product weight Length Diameter Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	26.8 mm	
Length Diameter Lifespan Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	26.8 mm	
Diameter Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference		
Lifespan Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	10.0 mm	
Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference		
Lifespan Tc Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference		
Lifespan B3 Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference		
Additional product data Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	350 h	
Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference	120 h	
Base (standard designation) Certificates & standards ECE category British standard Logistical data Order reference		
ECE category British standard <b>Logistical data</b> Order reference	W2.1x9.5d	
British standard Logistical data Order reference		
Logistical data Order reference	W5W	
Order reference	507	
Environmental information	N507	
Date of Declaration	06-03-2024	
Primary Article Identifier	4008321769442	
Candidate List Substance 1	4055462245403   4055462245342   5055175230092	
Declaration No. in SCIP database	4055462245342	

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N507	4008321769442	Folding box	10

Datasheet NEOLUX | 2024-05-05

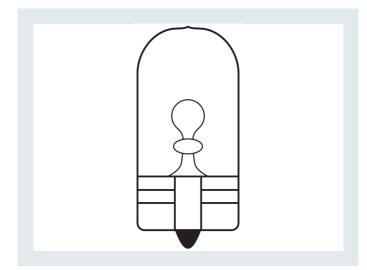



NEOLUX Automotive Lighting OSRAM GmbH Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com