

Standard 5 W 24 V BA15s

NEOLUX 24 V halogen lamps provide a good view and visibility in all road conditions. The lamps are easy to replace – the 24 V standard replacement is the ideal choice for this task.



Product family benefits

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

Product family features

- Broad product range
- Designed specifically for 24 V
- Lamps for exterior applications are ECE certified
- Good quality thanks to German technology
- Normed light output


Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



Application (Category and Product specific)	Auxiliary lamp	
Electrical data		
Power input	7 W	
Test voltage	28.0 V	
Power input tolerance	±10 %	
Nominal wattage	5.00 W	
Nominal voltage	24.0 V	
Photometrical data		
Luminous flux	50 lm	
Luminous flux tolerance	±20 %	
Dimensions & weight		
Product weight	6.02 g	
Length	37.5 mm	
Diameter	16.0 mm	
Lifespan		
Lifespan Tc	225 h	
Lifespan B3	80 h	
Additional product data		
Base (standard designation)	BA15s	
Certificates & standards		
ECE category	R5W	
British standard	149	
	149	
Logistical data	NI4.40	
Order reference	N149	
Environmental information		
Date of Declaration	06-03-2024	
Primary Article Identifier	4008321769329 4052899247451 4055462100917 4055462156136 5011274114947	
Candidate List Substance 1	No declarable substances contained	
Declaration No. in SCIP database	In work	
Packaging Information		

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N149	4008321769329	Folding box	10

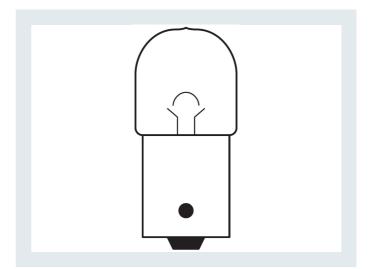



www.neolux-lighting.com

NEOLUX Automotive Lighting OSRAM GmbH Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020