


Standard 35/35 W 12 V PX43t

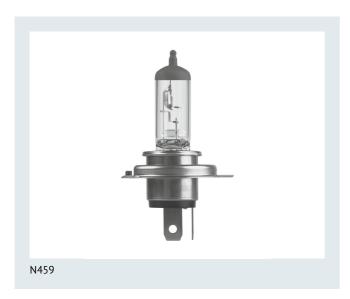

Product family benefits

- Reliable manufacturer
- Reliable products
- Good illumination of the road
- Suitable for the most common motorcycle headlights
- Affordable


Product family features

- Designed specifically for motorcycles
- Vibration-resistant
- ECE certified lamps
- · Broad product range
- Good quality thanks to German technology

Areas of application

Headlight

Product datasheet






Application (Category and Product specific)	Halogen headlight lamp	
Electrical data		
Power input	36.8 W	
Test voltage	13.2 V	
Nominal wattage	35/35 W	
Nominal voltage	120 V	
Photometrical data		
Color temperature	3200 K	
Luminous flux	820/520 lm	
Luminous flux tolerance	±15 %	
Dimensions & weight		
Product weight	2300 g	
Length	820 mm	
Diameter	1700 mm	
Lifespan		
Lifespan Tc	150 h	
Lifespan B3	75 h	
Additional product data		
Base (standard designation)	PX43t	
Capabilities		
Technology	Halogen lamp	
Certificates & standards		
ECE category	HS1	
Logistical data		
Order reference	N459	
Environmental information		
Date of Declaration	06-03-2024	
Primary Article Identifier	4052899270657 4052899485433 4062172053235 4055462245595	
Candidate List Substance 1	No declarable substances contain	
Declaration No. in SCIP database	In work	

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N459-01B	4052899270657	Blister	1
N459	4052899485433	Folding box	1

Product datasheet

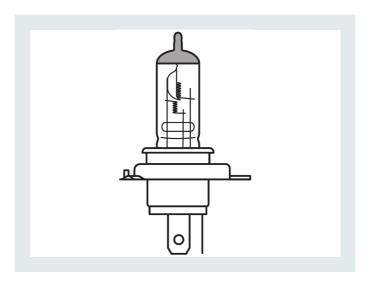



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com