



**NEOLUX®**  
GERMAN TECHNOLOGY

## Standard 5 W 12 V BA15s

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.



N207

### Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



N207



N207-02B

Product information	
Application (Category and Product specific)	Auxiliary lamp

Electrical Data	
Power input	5 W
Test voltage	13.5 V
Power input tolerance	±10 %
Nominal wattage	5 W
Nominal voltage	12 V

Photometric Data	
Nominal luminous flux	50 lm
Luminous flux tolerance	±20 %

Physical Attributes & Dimensions	
Diameter	19.0 mm
Product weight	6.00 g
Length	37.5 mm
Lamp base	BA15s
Diameter	19.0 mm


Lifetime Data	
Lifespan Tc	300 hr
Lifespan B3	100 hr

Certificates & standards	
ECE category	R5W
British standard	207

Logistical data	
Order reference	N207

Environmental & Regulatory Information	
Primary article identifier	4052899247406   4006584921225   4008321812636   5010633537045   4008321780966
Candidate list substance 1	No declarable substances contained
Declaration no. in SCIP database	No declarable substances contained

Packaging Information			
Packaging description	EAN	Packaging type	Amount of article
NEOLUX			
N207	4006584921225	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1
N207-02B	4008321780966	BLISTER	2

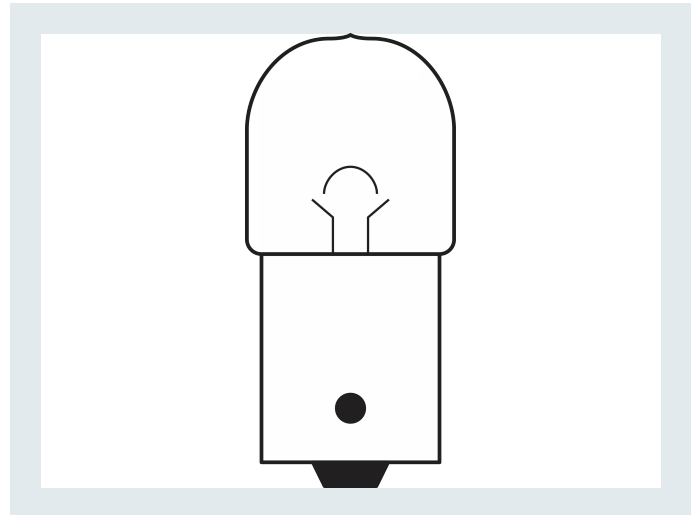

**NEOLUX®**  
GERMAN TECHNOLOGY

NEOLUX Automotive Lighting  
OSRAM GmbH

Marcel-Breuer-Str 4  
80807 Munich, Germany

Phone +49 89 6213-0  
Fax +49 89 6213-2020

[www.neolux-lighting.com](http://www.neolux-lighting.com)