

Standard 21 W 12 V BAU15s

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.



Areas of application

- · Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- · Instrument and switch lighting

Product datasheet






Application (Category and Product specific)	Auxiliary lamp
Electrical Data	
Power input	25 W
Test voltage	13.5 V
Power input tolerance	±6 %
Nominal wattage	21 W
Nominal voltage	12 V
Photometric Data	
Nominal luminous flux	280 lm
Luminous flux tolerance	±20 %
Physical Attributes & Dimensions	
Diameter	25.0 mm
Product weight	8.00 g
Length	52.6 mm
Lamp base	BAU15s
Diameter	25.0 mm
Lifetime Data	
Lifespan Tc	320 hr
Lifespan B3	120 hr
Certificates & standards	
ECE category	PY21W
British standard	581
Logistical data	
Order reference	N581
Environmental & Regulatory Information	
Primary article identifier	400832177089 400832178107 400832177050 406217220094 400832184273
Candidate list substance 1	No declarable substances con
Declaration no. in SCIP database	No declarable substances cor

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N581	4008321770509	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1
N581-02B	4008321781079	BLISTER	2

Product datasheet

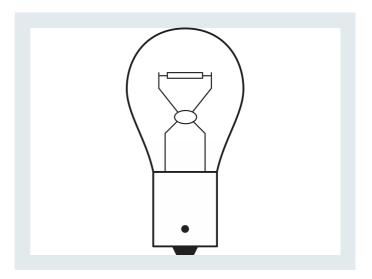



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com