



NEOLUX®
GERMAN TECHNOLOGY

Standard 21/5 W 12 V BAY15d

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.



N380

Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



N380



N380-02B

Product information	
Application (Category and Product specific)	Auxiliary lamp

Electrical Data	
Power input	25 W
Test voltage	13.5 V
Power input tolerance	±6 %
Nominal voltage	12 V

Photometric Data	
Nominal luminous flux	440/35 lm
Luminous flux tolerance	±15 %

Physical Attributes & Dimensions	
Diameter	25.0 mm
Product weight	10.50 g
Length	52.5 mm
Lamp base	BAY15d
Diameter	25.0 mm


Lifetime Data	
Lifespan Tc	160 hr
Lifespan B3	60 hr

Certificates & standards	
ECE category	P21/5W
British standard	380

Logistical data	
Order reference	N380

Environmental & Regulatory Information	
Primary article identifier	4008321770448 4008321799555 4008321812698 4008321770868 4052899225619
Candidate list substance 1	No declarable substances contained
Declaration no. in SCIP database	No declarable substances contained

Packaging Information			
Packaging description	EAN	Packaging type	Amount of article
NEOLUX N380	4008321770448	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1
N380-02B	4008321799555	BLISTER	2

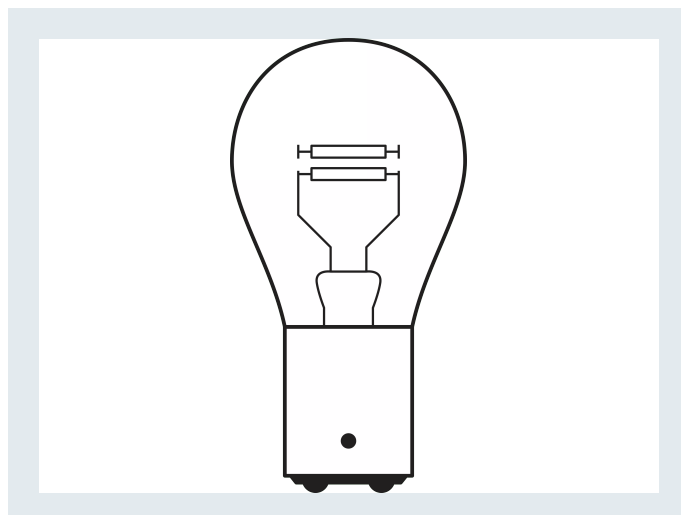

NEOLUX[®]
GERMAN TECHNOLOGY

NEOLUX Automotive Lighting
OSRAM GmbH

Marcel-Breuer-Str 4
80807 Munich, Germany

Phone +49 89 6213-0
Fax +49 89 6213-2020

www.neolux-lighting.com