

## Standard 5 W 12 V BA15d

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.




## Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



Application (Category and Product specific)	Auxiliary lamp	
Electrical Data		
Test voltage	13.5 V	
Nominal wattage	5 W	
Nominal voltage	12 V	
Physical Attributes & Dimensions		
Diameter	19.0 mm	
Product weight	6.00 g	
Length	37.5 mm	
Lamp base	BA15d	
Diameter	19.0 mm	
Lifetime Dete		
Lifetime Data Lifespan Tc	300 hr	
Lifespan B3	100 hr	
Certificates & standards	R5W	
ECE category British standard	209	
Logistical data		
Order reference	N209	
Environmental & Regulatory Information		
Primary article identifier	4006584920419	
Candidate list substance 1	No declarable substances contained	
Declaration no. in SCIP database	No declarable substances contained	

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N209	4006584920419	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1

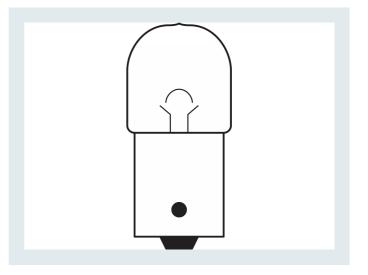



NEOLUX Automotive Lighting OSRAM GmbH Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com