


NEOLUX®
GERMAN TECHNOLOGY

Standard 4 W 12 V BA9s

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.

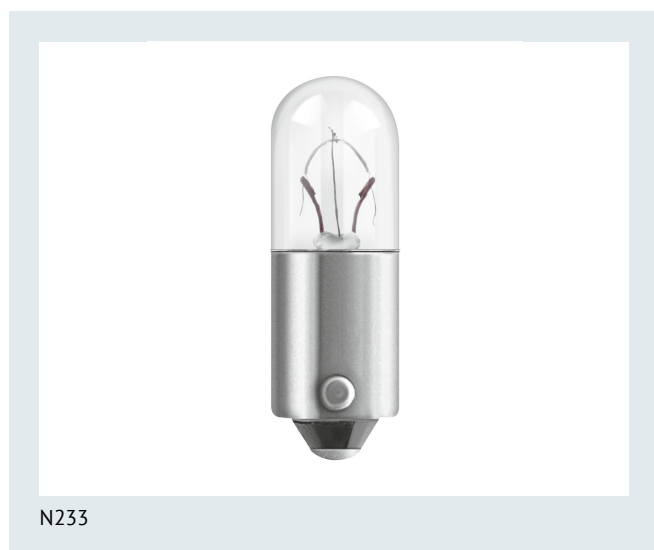

Product family benefits

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

Product family features

- Broad product range
- Good quality thanks to German technology
- Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution

Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



Product information	
Application (Category and Product specific)	Auxiliary lamp

Electrical data	
Power input	4 W
Test voltage	13.5 V
Power input tolerance	±10 %
Nominal wattage	400 W
Nominal voltage	120 V

Photometrical data	
Luminous flux	35 lm
Luminous flux tolerance	±20 %

Dimensions & weight	
Product weight	186 g
Length	274 mm
Diameter	900 mm

Lifespan	
Lifespan Tc	750 h
Lifespan B3	300 h


Additional product data	
Base (standard designation)	BA9s

Certificates & standards	
ECE category	T4W
British standard	233

Logistical data	
Order reference	N233

Environmental information	
Date of Declaration	06-03-2024
Primary Article Identifier	5010633537083 4006584920495 4006584827770 4055462156099 4055462301000
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	In work

Packaging Information			
Packaging description	EAN	Packaging type	Amount of article
NEOLUX N233	4006584920495	Folding box	10

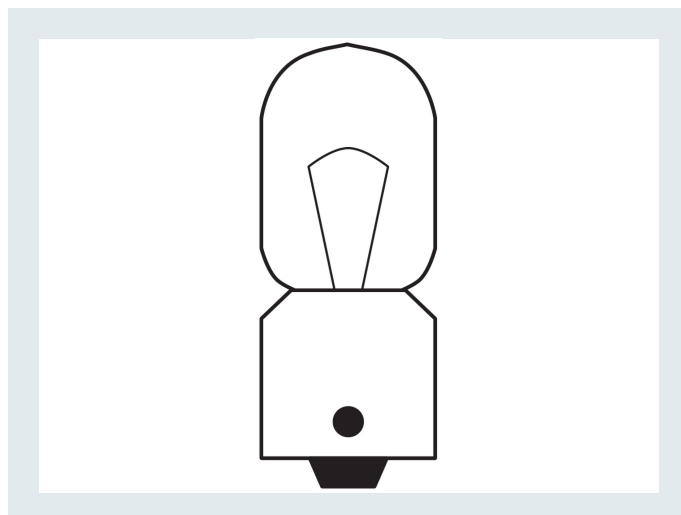

NEOLUX®
GERMAN TECHNOLOGY

NEOLUX Automotive Lighting
OSRAM GmbH

Marcel-Breuer-Str 4
80807 Munich, Germany

Phone +49 89 6213-0
Fax +49 89 6213-2020

www.neolux-lighting.com