

## Standard 10 W 12 V BAU15s

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.



## Areas of application


- · Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- · Instrument and switch lighting



Application (Category and Product specific)	Auxiliary lamp		
replication (category and Froduct specific)	Addition y tump		
Electrical Data			
Test voltage	13.5 V		
Nominal wattage	10 W		
Nominal voltage	12 V		
Physical Attributes & Dimensions			
Diameter	16.0 mm		
Product weight	5.50 g		
Length	37.5 mm		
Lamp base	BAU15s		
Diameter	16.0 mm		
Lifetime Data			
Lifespan Tc	300 hr		
Lifespan B3	100 hr		
Certificates & standards			
ECE category	RY10W		
British standard	245A		
Logistical data			
Order reference	N245A		
Environmental & Regulatory Information			
Primary article identifier	4008321768407		
Candidate list substance 1	No declarable substances contained		
Declaration no. in SCIP database	No declarable substances containe		

## Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N245A	4008321768407	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1

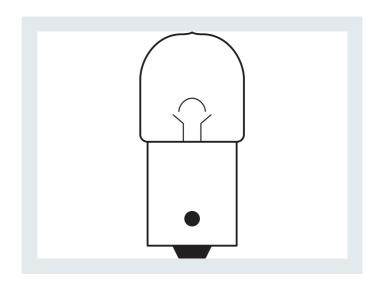

## **Product datasheet**



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com