

Standard 5 W 12 V SV8.5-8

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.



Areas of application

- · Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- · Instrument and switch lighting

Product datasheet






Power input	5 W	
Test voltage	13.5 V	
Power input tolerance	±10 %	
Nominal wattage	5 W	
Nominal voltage	12 V	
Photometric Data		
Nominal luminous flux	45 lm	
Luminous flux tolerance	±20 %	
Physical Attributes & Dimensions		
Diameter	11.0 mm	
Product weight	2.90 g	
Length	36.0 mm	
Lamp base	SV8.5-8	
Diameter	11.0 mm	
Lifetime Data		
Lifespan Tc	750 hr	
Lifespan B3	350 hr	
Certificates & standards		
ECE category	C5W	
British standard	239	
Logistical data		
	N239	
Order reference		
Order reference Environmental & Regulatory Information Primary article identifier	4008321780553 4052899338210 5010633537182 4008321770356	
Environmental & Regulatory Information Primary article identifier	4052899338210 5010633537182	
Environmental & Regulatory Information	4052899338210 5010633537182 4008321770356 4006584921515 4008321867490	

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N239	4008321770356	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1
N239-02B	4008321780553	BLISTER	2

Product datasheet

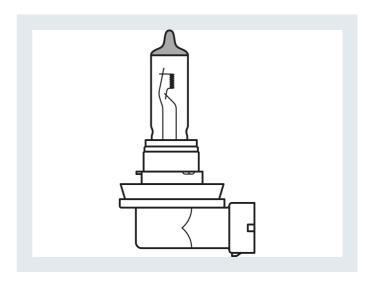



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com