

Standard 21 W 12 V W3x16d

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.



Areas of application

- · Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- · Instrument and switch lighting

Product datasheet




Application (Category and Product specific)	Auxiliary lamp	
Electrical Data		
Power input	25 W	
Test voltage	13.5 V	
Power input tolerance	±6 %	
Nominal wattage	21 W	
Nominal voltage	12 V	
Photometric Data		
Nominal luminous flux	280 lm	
Luminous flux tolerance	±20 %	
Dhysical Attributes & Dissessions		
Physical Attributes & Dimensions Diameter	20.0 mm	
Product weight	6.00 g	
Length	47.5 mm	
Lamp base	WX3x16d	
Diameter	20.0 mm	
Lifetime Data		
Lifespan Tc	600 hr	
Lifespan B3	400 hr	
Certificates & standards		
ECE category	WY21W	
Logistical data		
Order reference	N582A	
Environmental & Regulatory Information		
Primary article identifier	4052899276512	
Candidate list substance 1	No declarable substances contained	
Declaration no. in SCIP database	No declarable substances containe	

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N582A	4052899276512	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1

Product datasheet

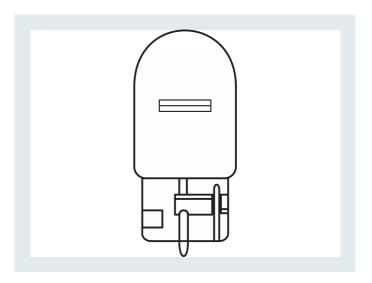



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com