

Standard 5 W 12 V W2.1x9.5d

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.



Areas of application

- · Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- · Instrument and switch lighting


Product datasheet



Application (Category and Product specific)	Auxiliary lamp	
Electrical Data		
Power input	5 W	
Test voltage	13.5 V	
Power input tolerance	±10 %	
Nominal wattage	5 W	
Nominal voltage	12 V	
Photometric Data		
Nominal luminous flux	30 lm	
Luminous flux tolerance	±20 %	
Physical Attributes & Dimensions		
Diameter	10.0 mm	
Product weight	1.37 g	
Length	26.8 mm	
Lamp base	W2.1x9.5d	
Diameter	10.0 mm	
Lifetime Data		
Lifespan Tc	1000 hr	
Lifespan B3	350 hr	
Certificates & standards		
ECE category	WY5W	
British standard	501A	
Logistical data		
Order reference	N501A	
Environmental & Regulatory Information		
Primary article identifier	4052899570702 4052899570825	
ndidate list substance 1 No declarable substances of		
Declaration no. in SCIP database	No declarable substances containe	

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N501A	4052899570702	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1

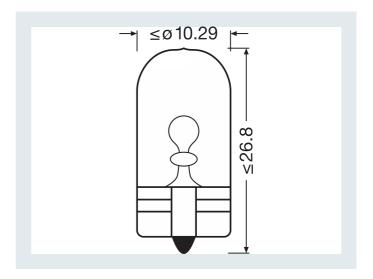



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com