NEOLUX®
GERMAN TECHNOLOGY

Standard 5 W 12 V BA15s

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.

N207

Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting

N207

N207-02B

Product information	
Application (Category and Product specific)	Auxiliary lamp

Electrical Data	
Power input	5 W
Test voltage	13.5 V
Power input tolerance	±10 %
Nominal wattage	5 W
Nominal voltage	12 V

Photometric Data	
Nominal luminous flux	50 lm
Luminous flux tolerance	±20 %

Physical Attributes & Dimensions	
Product weight	6.00 g
Length	37.5 mm
Lamp base	BA15s
Diameter	19.0 mm

Lifetime Data	
Lifespan Tc	300 hr
Lifespan B3	100 hr

Certificates & standards	
ECE category	R5W
British standard	207

Logistical data	
Order reference	N207

Environmental & Regulatory Information	
Primary article identifier	4052899247406 | 4006584921225 | 4008321812636 | 5010633537045 | 4008321780966
Candidate list substance 1	No declarable substances contained
Declaration no. in SCIP database	No declarable substances contained

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N207	4006584921225	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1
N207-02B	4008321780966	BLISTER	2
N207S	5010633537045	FOLDING BOX	1

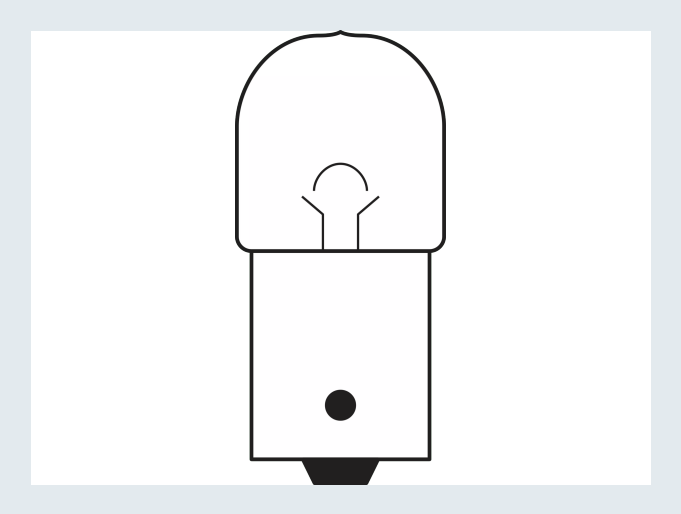

NEOLUX®
GERMAN TECHNOLOGY

NEOLUX Automotive Lighting
OSRAM GmbH

Marcel-Breuer-Str 4
80807 Munich, Germany

Phone +49 89 6213-0
Fax +49 89 6213-2020

www.neolux-lighting.com