

# Standard 1.2 W 12 V W2x4.6d

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.



#### **Product family benefits**

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

### **Product family features**

- Broad product range
- Good quality thanks to German technology
- · Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution


#### Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting

Electrical data		
Power input	1.22 W	
Test voltage	13.5 V	
Power input tolerance	±15 %	
Nominal wattage	120 W	
Nominal voltage	120 V	
Photometrical data		
Luminous flux	75 lm	
Luminous flux tolerance	±20 %	
Dimensions & weight		
Product weight	040 g	
Length	200 mm	
Diameter	500 mm	
Lifespan		
Lifespan Tc	1500 h	
Lifespan B3	500 h	
Additional product data		
Base (standard designation)	W2x4.6d	
Certificates & standards		
British standard	286	
Logistical data		
Order reference	N286	
Environmental information		
Date of Declaration	06-03-2024	
Primary Article Identifier	4008321771049   4055462031129   4055462053015   4008321770653   4055462066299	
Candidate List Substance 1	No declarable substances contained	
Declaration No. in SCIP database	In work	

## Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N286S	4008321771049	Folding box	1

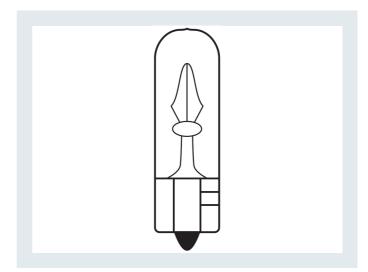



www.neolux-lighting.com

NEOLUX Automotive Lighting OSRAM GmbH Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020