

## Standard 21 W 12 V W3x16d

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.



## **Product family benefits**

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

## **Product family features**

- Broad product range
- Good quality thanks to German technology
- Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution

## Areas of application


- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



| Application (Category and Product specific) | Auxiliary lamp                     |  |
|---|------------------------------------|--|
|   |                                    |  |
| Electrical data                             |                                    |  |
| Power input                                 | 25 W                               |  |
| Test voltage                                | 13.5 V                             |  |
| Power input tolerance                       | ±6 %                               |  |
| Nominal wattage                             | 2100 W                             |  |
| Nominal voltage                             | 120 V                              |  |
| Photometrical data                          |                                    |  |
| Luminous flux                               | 280 lm                             |  |
| Luminous flux tolerance                     | ±20 %                              |  |
|   |                                    |  |
| Dimensions & weight                         |                                    |  |
| Product weight                              | 600 g                              |  |
| Length                                      | 475 mm                             |  |
| Diameter                                    | 2000 mm                            |  |
| Lifespan                                    |                                    |  |
| Lifespan Tc                                 | 600 h                              |  |
| Lifespan B3                                 | 400 h                              |  |
| Additional product data                     |                                    |  |
| Base (standard designation)                 | WX3x16d                            |  |
|   |                                    |  |
| Certificates & standards                    |                                    |  |
| ECE category                                | WY21W                              |  |
| Logistical data                             |                                    |  |
| Order reference                             | N582A                              |  |
| Environmental information                   |                                    |  |
| Date of Declaration                         | 06-03-2024                         |  |
| Primary Article Identifier                  | 4052899276512                      |  |
|   | 4055462301628                      |  |
| Candidate List Substance 1                  | No declarable substances contained |  |
| Candidate List Substance 1                  | Substances contained               |  |

| Packaging description<br>NEOLUX | EAN           | Packaging type | Amount of article |
|---------------------------------|---------------|----------------|-------------------|
| N582A                           | 4052899276512 | Folding box    | 10                |

Datasheet NEOLUX | 2024-04-25

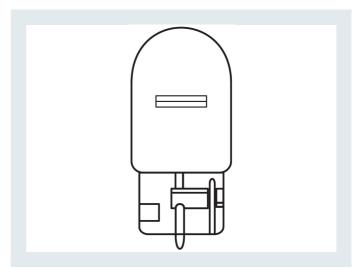



www.neolux-lighting.com

NEOLUX Automotive Lighting OSRAM GmbH Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020