

Standard 5 W 12 V W2.1x9.5d

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.



Product family benefits

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

Product family features

- Broad product range
- Good quality thanks to German technology
- Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution

Areas of application


- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



Application (Category and Product specific)	Auxiliary lamp	
Electrical data		
Power input	5 W	
Test voltage	13.5 V	
Power input tolerance	±10 %	
Nominal wattage	5.00 W	
Nominal voltage	12.0 V	
Photometrical data		
Luminous flux	30 lm	
Luminous flux tolerance	±20 %	
Dimensions & weight		
Product weight	1.37 g	
Length	26.8 mm	
Diameter	10.0 mm	
Lifespan		
Lifespan Tc	1000 h	
Lifespan B3	350 h	
Additional product data		
Base (standard designation)	W2.1x9.5d	
Certificates & standards		
ECE category	WY5W	
British standard	501A	
Logistical data		
Order reference	N501A	
Environmental information		
Date of Declaration	06-03-2024	
Primary Article Identifier	4055462206428 4052899570825 4052899570702	
Candidate List Substance 1	No declarable substances contained	
Declaration No. in SCIP database	In work	

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N501A	4052899570702	Folding box	10

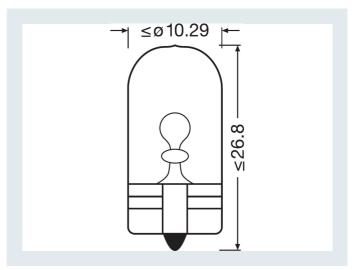



www.neolux-lighting.com

NEOLUX Automotive Lighting OSRAM GmbH Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020