




NEOLUX®
GERMAN TECHNOLOGY

NCB21 FS2

NEOLX

With the NEOLUX LED Canbus Control, you can eliminate error messages as well as indicator hyperflashing, both of which can result from the low amount of electricity used by LED retrofits. Through the thermal decoupling from the lamp, the LED Canbus Control ensures that the brightness and lifetime of your LEDs are maintained.

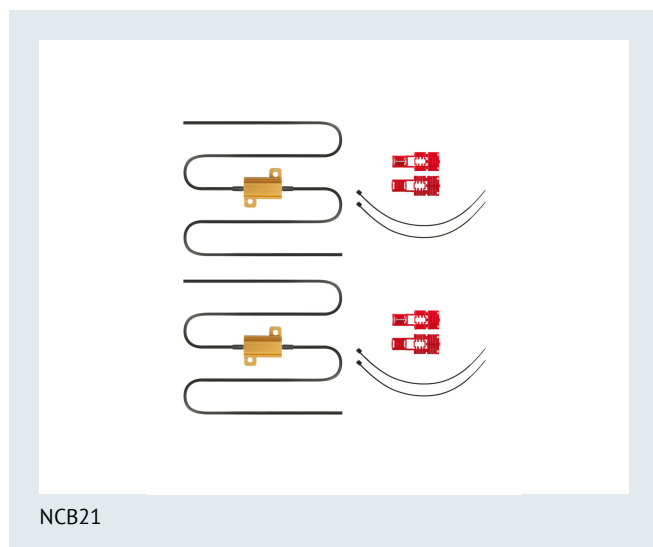

Product family benefits

- No irritating warning lights
- No extra heat for lamps compared to lamps with included resistor
- Maintain full benefits of your NEOLUX LED retrofits and NEOLUX fog light
- User friendly handling
- Longer replacement cycle of retrofit

Product family features

- Elimination of error messages caused by lower wattages of LED lamps
- Long lifetime
- Available for 5 W or 21 W
- Universal fit
- Good quality thanks to robust components

Areas of application

- Eliminates warning messages created by the lower level of energy consumption of LED Retrofits



NCB21

Product information

Application (Category and Product specific)	Accessories for LED retrofits
---	-------------------------------

Electrical data

Power input	25.20 W
Power input tolerance	±20 %
Nominal wattage	2100 W

Dimensions & weight

Diameter	200 mm
Product weight	2600 g
Length	270 mm

Lifespan

Lifespan Tc	2000 h
Lifespan B3	2000 h

Capabilities

Technology	LED
------------	-----

Certificates & standards

ECE category	-
--------------	---

Logistical data


Order reference	NCB21
-----------------	-------

Environmental information

Date of Declaration	06-03-2024
Primary Article Identifier	4052899489134
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	e562a7f0-ba23-458e-808c-42de64d0c2d5

Packaging Information

Packaging description	EAN	Packaging type	Amount of article
NEOLUX			
NCB21	4052899489134	Folding box	2

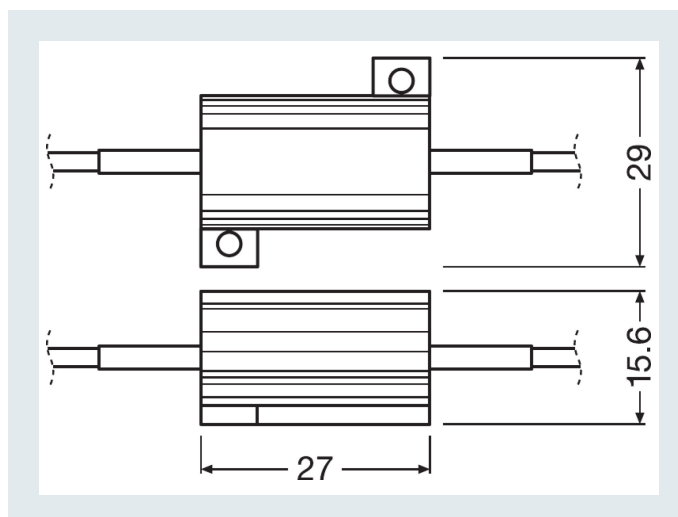

NEOLUX®
GERMAN TECHNOLOGY

NEOLUX Automotive Lighting
OSRAM GmbH

Marcel-Breuer-Str 4
80807 Munich, Germany

Phone +49 89 6213-0
Fax +49 89 6213-2020

www.neolux-lighting.com