

Standard 21/5 W 12 V BAY15d



Product family benefits

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

Product family features

- Broad product range
- Good quality thanks to German technology
- Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution

Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting

Product datasheet






| Application (Category and Product specific) | Auxiliary lamp |
|---|----------------|
| | |
| Electrical data | 25.11 |
| Power input | 25 W |
| Test voltage | 13.5 V |
| Power input tolerance | ±6 % |
| Nominal wattage | 21/5 W |
| Nominal voltage | 12.0 V |
| Photometrical data | |
| Luminous flux | 440/35 lm |
| Luminous flux tolerance | ±15 % |
| Dimensions & weight | |
| Diameter | 27.0 mm |
| Product weight | 10.50 g |
| Length | 52.5 mm |
| Lifespan | |
| Lifespan Tc | 160 h |
| Lifespan B3 | 60 h |
| Additional product data | |
| Base (standard designation) | BAY15d |
| Certificates & standards | |
| ECE category | P21/5W |
| British standard | 380 |
| | |
| Logistical data | |
| Order reference | N380 |
| Environmental information | |
| Date of Declaration | 06-03-2024 |
| Primary Article Identifier | 4008321770448 |
| Filmary Article Identifier | 4006321770446 |

| Date of Declaration | 06-03-2024 | |
|----------------------------------|---|--|
| Primary Article Identifier | 4008321770448 4008321770868 4008321799555 | |
| | 4008321812698 4006584795659 4006584795673 | |
| | 4055462033925 4052899225619 4055462079787 | |
| | 4055462300881 4006584920211 4055462432216 | |
| Candidate List Substance 1 | No declarable substances contained | |
| Declaration No. in SCIP database | In work | |

Packaging Information

| Packaging description NEOLUX | EAN | Packaging type | Amount of article |
|------------------------------|---------------|----------------|-------------------|
| N380 | 4008321770448 | Folding box | 10 |
| N380-02B | 4008321799555 | Blister | 2 |

Product datasheet

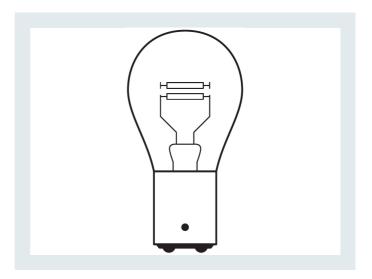



NEOLUX Automotive Lighting OSRAM GmbH

Marcel-Breuer-Str 4 80807 Munich, Germany Phone +49 89 6213-0 Fax +49 89 6213-2020

www.neolux-lighting.com