NEOLUX®
GERMAN TECHNOLOGY

Standard 21 W 12 V BAU15s

Whether you're a passionate biker or an occasional rider – NEOLUX always has the right lamp to enhance your riding experience. Thanks to technology specifically developed for motorcycles, NEOLUX motorcycle lamps with halogen technology are vibration-resistant.

N581

Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting

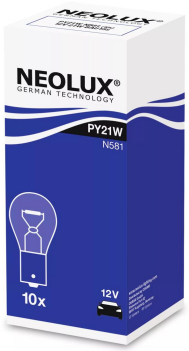

N581

N581-02B

Product information	
Application (Category and Product specific)	Auxiliary lamp

Electrical Data	
Power input	25 W
Test voltage	13.5 V
Power input tolerance	±6 %
Nominal wattage	21 W
Nominal voltage	12 V

Photometric Data	
Nominal luminous flux	280 lm
Luminous flux tolerance	±20 %

Physical Attributes & Dimensions	
Product weight	8.00 g
Length	52.6 mm
Lamp base	BAU15s
Diameter	25.0 mm

Lifetime Data	
Lifespan Tc	320 hr
Lifespan B3	120 hr

Certificates & standards	
ECE category	PY21W
British standard	581

Logistical data	
Order reference	N581

Environmental & Regulatory Information	
Primary article identifier	4008321770899 | 4008321781079 | 4008321770509 | 4062172200943 | 4008321842732
Candidate list substance 1	No declarable substances contained
Declaration no. in SCIP database	No declarable substances contained

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
N581	4008321770509	UNPACKED (UNPACKED SELLING UNIT FOR END USERS)	1
N581S	4008321770899	FOLDING BOX	1
N581-02B	4008321781079	BLISTER	2

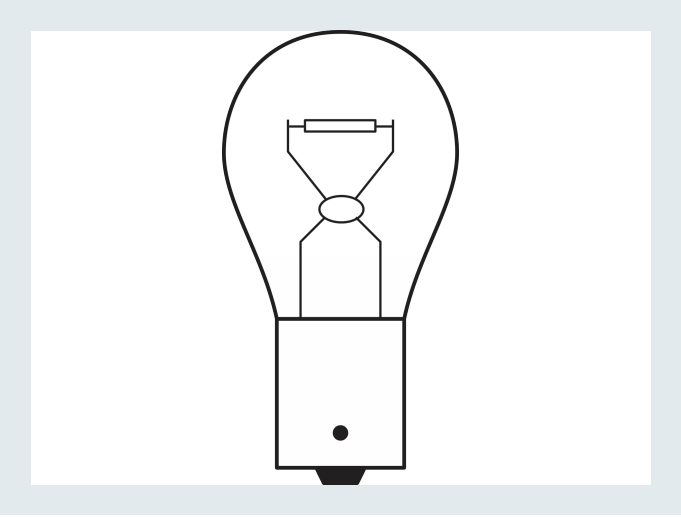

NEOLUX®
GERMAN TECHNOLOGY

NEOLUX Automotive Lighting
OSRAM GmbH

Marcel-Breuer-Str 4
80807 Munich, Germany

Phone +49 89 6213-0
Fax +49 89 6213-2020

www.neolux-lighting.com